RCD Sockets & Spurs Datasheet
SMR13A/030 - Type A RCD Metal Double Socket (Switched)

CONSTRUCTION AND FEATURES:

- Twin 13A 30mA RCD switched socket
- Type A
- Complete with test button
- 'Passive' type latching
- Extra protection for specific equipment

TECHNICAL DATA:

- Rated voltage: 240V AC
- Rated current: 13A max
- Frequency: 50Hz
- Tripping current: 30mA
- Tripping speed: 40mS max
- Residual current characteristic: Type A, Type AC
- Voltage surge: 4K (100KHz Ring Wave)
- Breaking capacity: 250A
- Short circuit withstand: 1.5kA
- Endurance: 3000 cycles min
- Hit-Pot test: 2000V / 1 minute
- IP rating: IP4X
- Conforms to BS 7288:2016 & BS 1363

WIRING DIAGRAM:

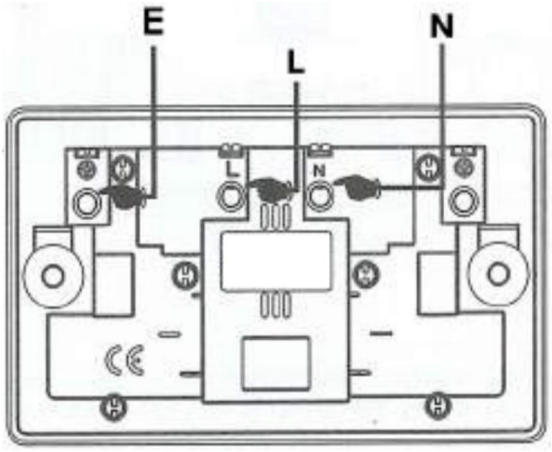

DIMENSIONAL SKETCH:

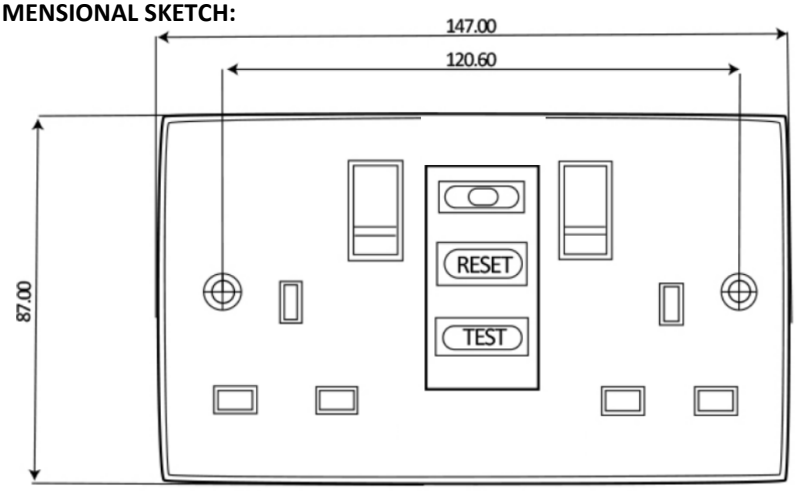

0161 989 5636
sales@cudis.co.uk
www.cudis.co.uk

Cudis Ltd | Unit 7 | Bridge Trading Estate | Bolton Road | Bury | Lancashire | BL8 2AQ

Company Number: 5230706
VAT Number: 286 3362 60

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE, SEE CUDIS TERMS AND CONDITIONS,FOR ADDITIONAL INFORMATION REFER TO THE APPLICABLE STANDARD