

Rotary Isolator Datasheet

2 pole, DC 2, Rotary Isolators




CONSTRUCTION AND FEATURES:

- Enclosed rotary isolators
- Constructed from tough flame retardant material
- Suitable for internal and external applications
- Several gland knock outs
- Pad-lockable rotary handle
- Lid not removeable with switch in ON position


TECHNICAL DATA:

- Current range: 16A, 20A, 32A
- GR216/DC, DC-21B: 1000V, 16A
- GR220/DC, DC-21B: 1000V, 20A
- GR232/DC, DC-21B: 1000V, 32A
- Operating cycle durability: 5E4
- IP rating: IP65
- Compliant to: BS EN 60947-3
- Switch configuration:
 - ◆ GR216/DC and GR220/DC: 6 switches, 3 wired in series, per pole (series wiring fitted)
 - ◆ GR232/DC: 4 switches, 2 wired in series, per pole (series wiring not fitted)

WIRING DIAGRAM:

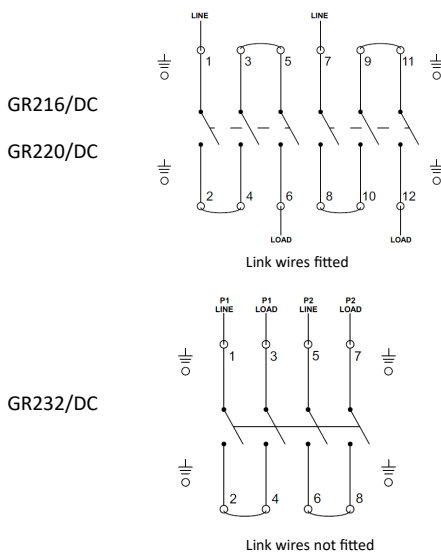

DIMENSIONAL INFORMATION:

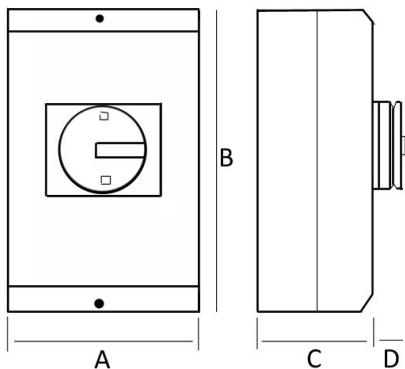

Pt No	No of poles	Current Rating (A)	DIMENSIONS (mm)			
			A	B	C	D
GR216/DC	2	16	85	132	66	32
GR220/DC	2	20	85	132	66	32
GR232/DC	2	32	85	132	66	32

