


2, 3 and 4 pole Isolator Range Datasheet

IS2100, IS2125, IS3100, IS3124, IS4100, IS4125

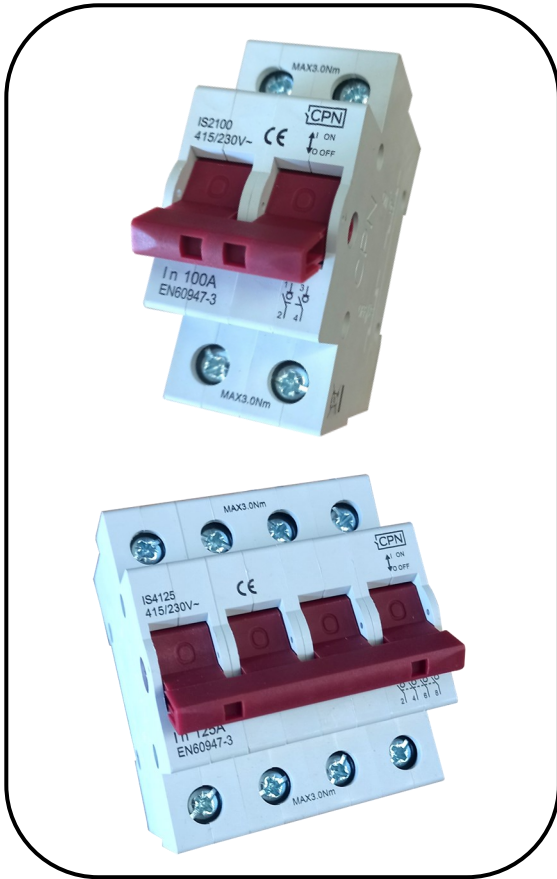

CONSTRUCTION AND FEATURES:

- Designed for use in the CUDIS range of consumer units, enclosures and 3 phase boards
- Satisfies most domestic, commercial and industrial applications
- Capable of switching electrical circuits while under load
- ON/OFF indication
- 2, 3 and 4 pole variants

TECHNICAL DATA:

- Rated currents: 100A and 125A
- Rated voltage: 230/415V AC
- Rated frequency: 50/60Hz
- Torque setting: 3Nm MAX
- Terminal capacity: 35mm²
- Terminal type: screw clamp
- Mounting: 35mm DIN rail
- Compliant to: BS EN 60937-3

DIMENSIONAL SKETCH:

