


# Metal Lumo® Garage and Shower Unit Datasheet

## MCU04/W/1 to /5



### DIMENSIONAL INFORMATION:

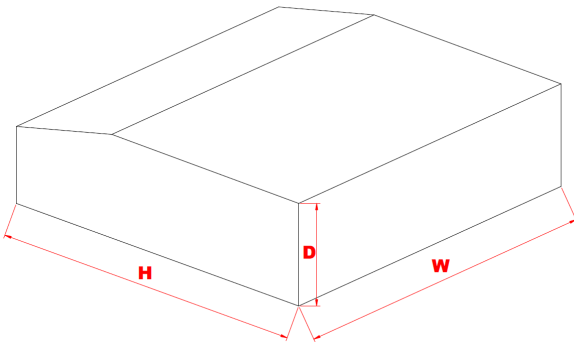

### CONSTRUCTION AND FEATURES:

- 4 module units
- 5 standard versions available (others available on request)
- 1.2mm steel
- Powder coated gloss white
- LED illuminating feature LUMO® as standard
- 40mm tail entry knockouts
- Multiple knockouts all around the unit (including rear face)
- Label and instruction sheet included
- Accessory pack (including battery)
- BS7671 Amendment 3 - regulation 421.1.201 compliant

### TECHNICAL DATA:

- Rated current: 100A
- RCD options: 30 to 300mA, 63A to 100A, type A and AC
- Compatible with:
  - ROH & ROM RCBOs
  - MD, MC, MH MCBs
  - IS2100 Isolators
  - RC2 RCDs
  - Various SPDs
- Earthing: stud, contact bushes and 1 x terminal bar
- 1 x Neutral terminal bar
- Busbar: 100A pin type
- Neutral cable: Insulated, copper braid, heat pressed ends
- Complies to: BS EN 61439-3

Part No	Description	No of spare ways	H (mm)	W (mm)	D (mm)
MCU04/W/1	4 way, with 1xRC263/030, 1xMD106B, 1xMD116B	0	230	146	110
MCU04/W/2	4 way, with 1xRC263/030, 1xMD106B, 1xMD120B	0	230	146	110
MCU04/W/3	4 way, with 1xRC263/030, 1xMD106B, 1xMD132B	0	230	146	110
MCU04/W/4	4 way, with 1xRC263/030, 1xMC140C	1	230	146	110
MCU04/W/5	4 way, with 1xRC263/030, 1xMC150C	1	230	146	110

