MH Range
Miniature Circuit Breaker Datasheet

CONSTRUCTION AND FEATURES:

- Miniature Circuit Breaker protects against overload and short circuit currents
- Contact position indicator - ON/OFF
- Can be used as an infrequent ON/OFF switch.
- For use in CPN Cudis 3 Phase Distribution Boards & Consumer Units

TECHNICAL DATA:

- Number of poles: 1, 2, 3 & 4
- Current rating: 6, 10, 16, 20, 25, 32, 40, 50, 63A
- Trip curves: B, C & D
- Interrupt capacity: 10kA
- Voltage range: 230-415V AC at 50hZ, DC voltage up to 60V
- Operating temperature range -5°C - 40°C
- Maximum ambient operating temperature: 40°C
- Electro-mechanical endurance: 4000 cycles
- Connection: screw clamp terminal
- Connection capacity: rigid conductor up to 25mm2
- Terminal fastening torque: 2.5Nm (maximum)
- Mounting: 35mm
- DIN rail connections: fork & pin bus-bar
- Switch: pad-lockable toggle

DIMENSIONAL SKETCH:

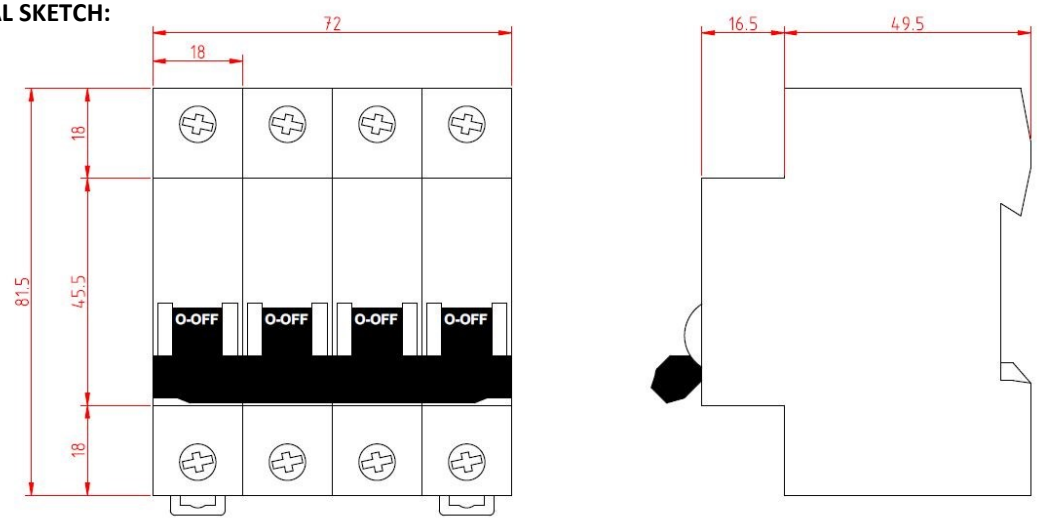

0161 989 5636
sales@cudis.co.uk
www.cudis.co.uk

Cudis Ltd | Unit 7 | Bridge Trading Estate | Bolton Road | Bury | Lancashire | BL8 2AQ

Company Number: 5230706
VAT Number: 286 3362 60

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE, SEE CUDIS TERMS AND CONDITIONS,FOR ADDITIONAL INFORMATION REFER TO THE APPLICABLE STANDARD