

RCD Sockets & Spurs Datasheet

SU13P - Type A RCD Plastic Fused Spur Unit

CONSTRUCTION AND FEATURES:


- 13A 30mA RCD fused spur
- Type A
- Complete with test button
- 'Passive' type latching
- Useful for protection of fixed appliances

TECHNICAL DATA:

- Rated voltage: 240V AC
- Rated current: 13A max
- Frequency: 50Hz
- Tripping current: 30mA
- Tripping speed: 40mS max
- Residual current characteristic: Type A, Type AC
- Voltage surge: 4K (100KHz Ring Wave)
- Breaking capacity: 250A
- Short circuit withstand: 1.5kA
- Endurance: 3000 cycles min
- Hit-Pot test: 2000V / 1 minute
- IP rating: IP4X
- Minimum box depth: 25mm
- Conforms to BS 7288:2016 & BS 1363



WIRING DIAGRAM:

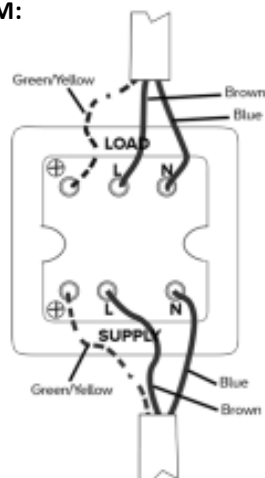

DIMENSIONAL SKETCH:

